
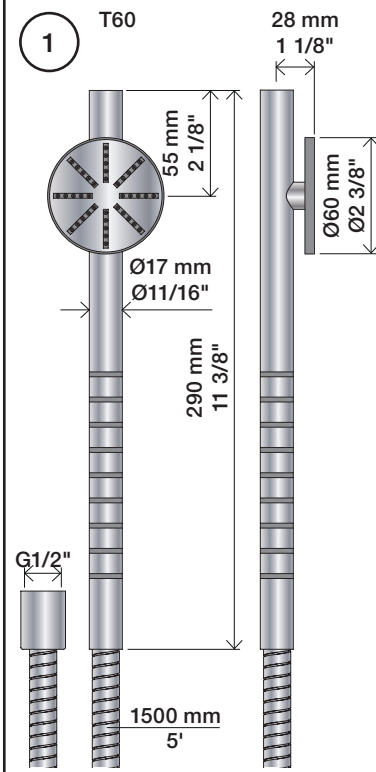
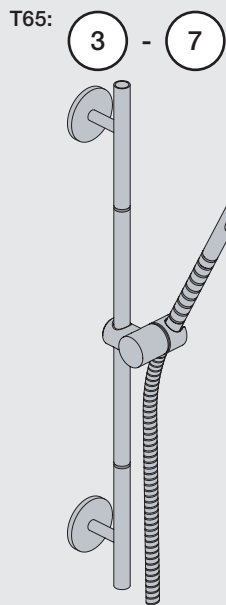




Fitting instruction  
 Montageanleitung  
 Monteringsvejledning  
 Monteringsvægledning  
 Montage hanleiding  
 Manuel de montage

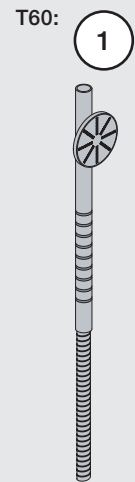

| Data             | Bar:                 | 1          | 2          | 3         | 4         | 5         |
|------------------|----------------------|------------|------------|-----------|-----------|-----------|
| T60              | (l/min)<br>(Gal/min) | 6.9<br>1.8 | 9.8<br>2.6 | 12<br>3.2 | 14<br>3.7 | 15<br>4.1 |
| Max. 65°C. 150°F |                      |            |            |           |           |           |

USA:  
 Max. flow rate:  
 1.6 Gal/min  
 6.0 l/min.





Service - VR556

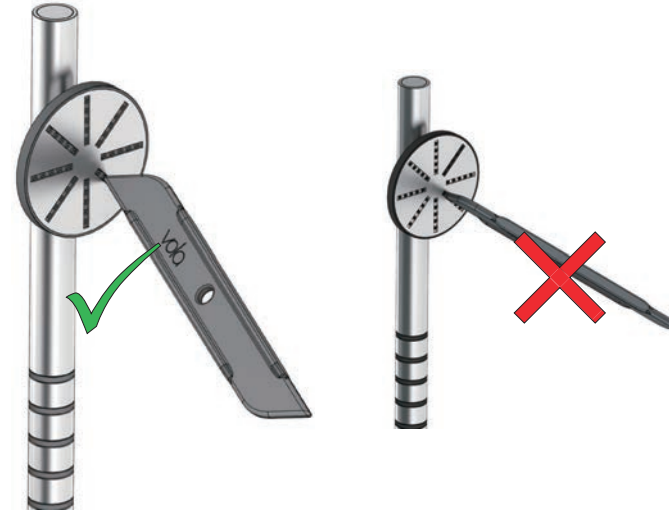


Bathtub  
Badewanne

Badekar  
Badkar


Badkuip  
Baignoire

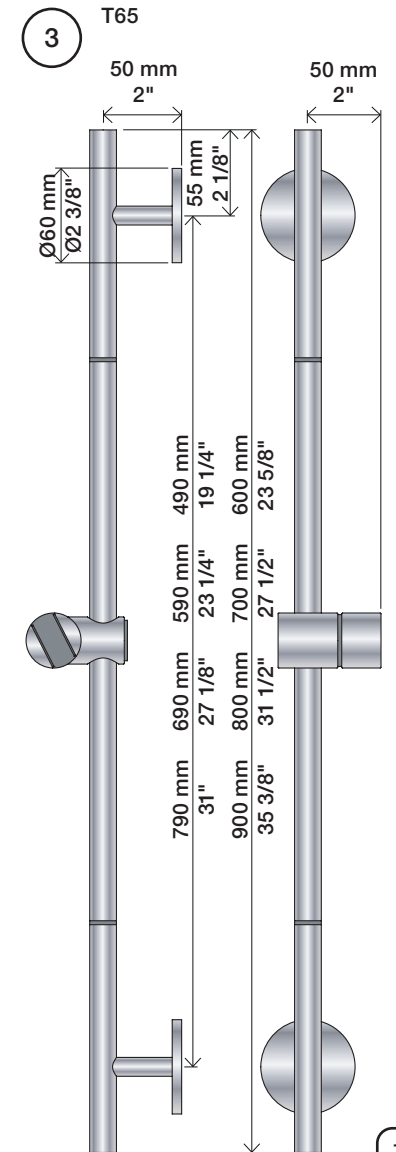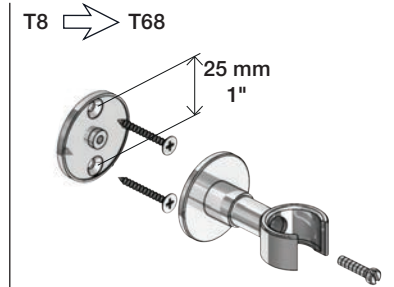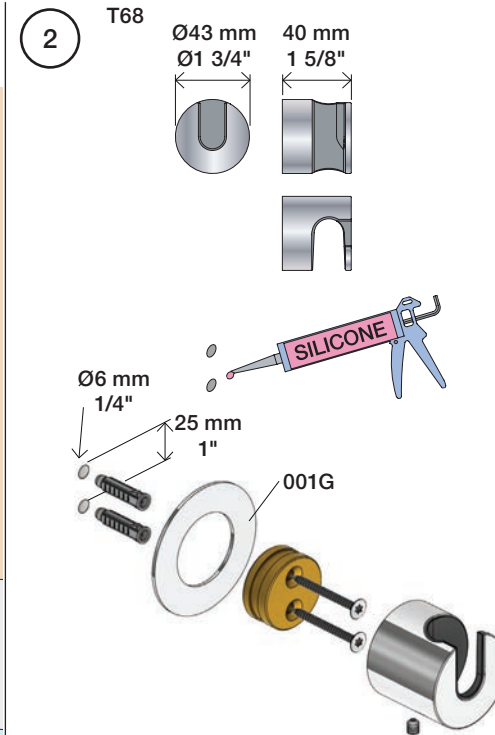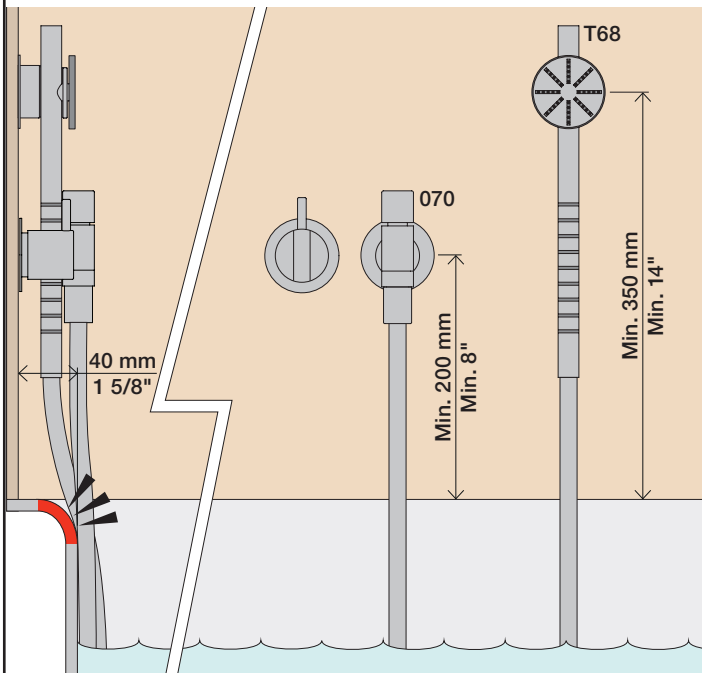




4

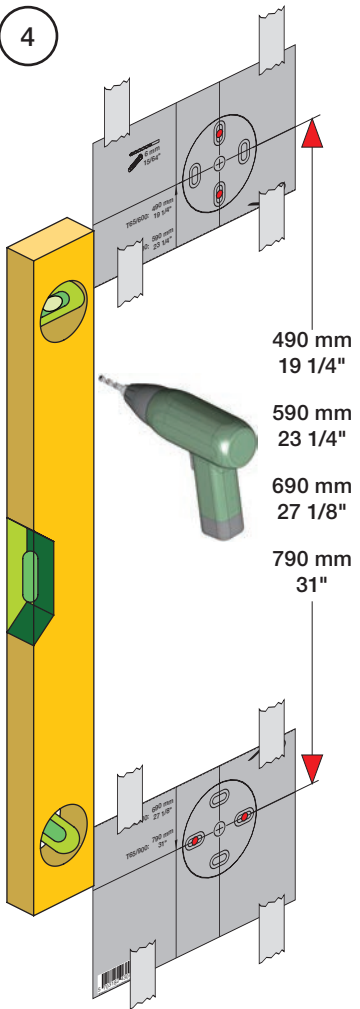



490 mm  
19 1/4"  
590 mm  
23 1/4"  
690 mm  
27 1/8"  
790 mm  
31"

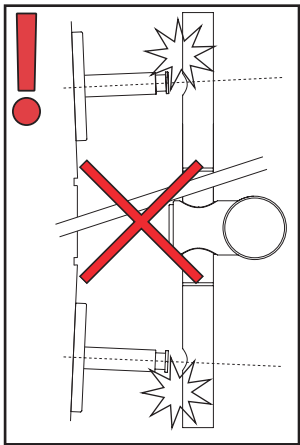


5

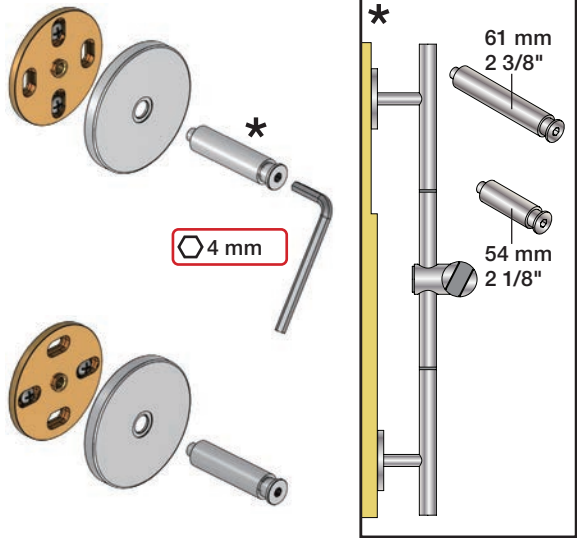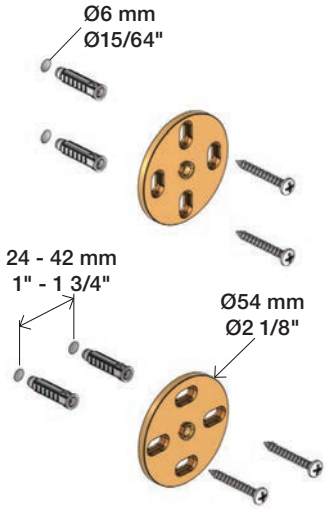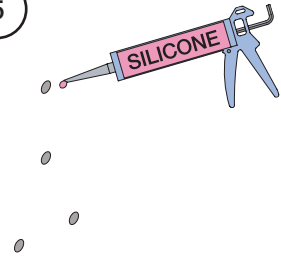

6

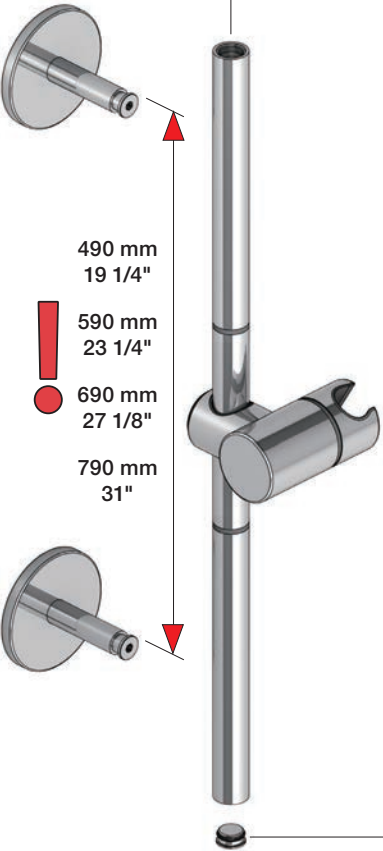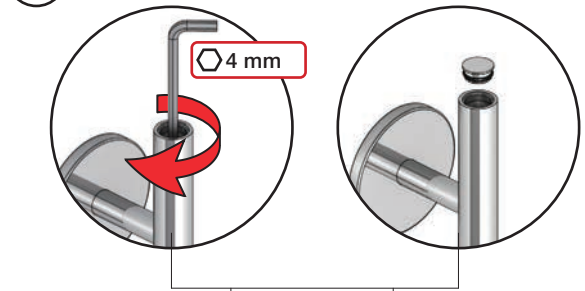

490 mm  
19 1/4"  
590 mm  
23 1/4"  
690 mm  
27 1/8"  
790 mm  
31"

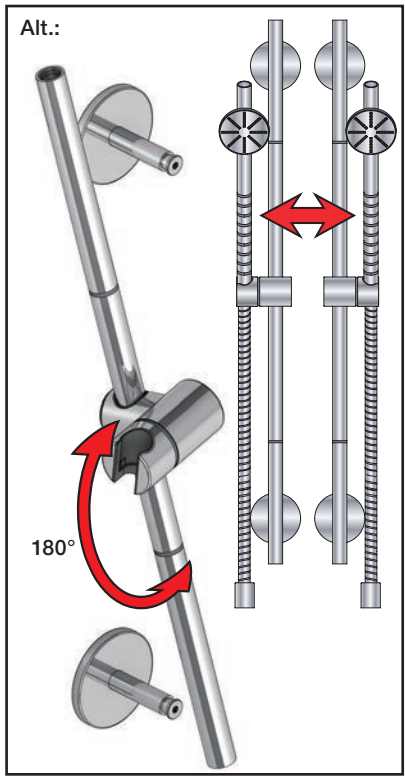


7




8








161L USA Only (2 Gal/min - 7.6 l/min - US Standard)  
1575



1570 (2 M)  
1570A (1.75 M)  
1570B (1.5 M)

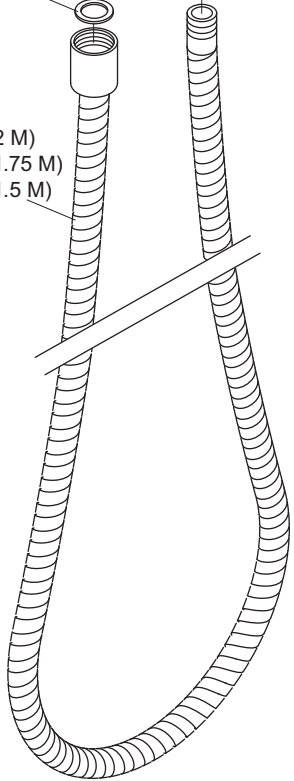

1578 (2 M)  
1578A (1.75 M)  
1578B (1.5 M)

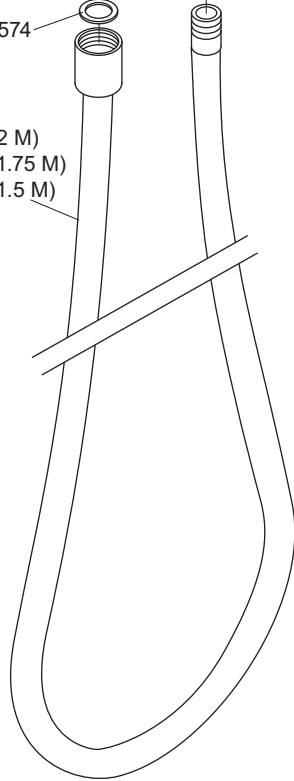

**VOLA A/S**  
Lunavej 2  
DK-8700 Horsens  
Tlf : + 45 7023 5500  
Fax: + 45 7023 5511  
sales@vola.com  
www.vola.com

**VOLA T60**

Dato  
Mar. 15

Rev.  
0

Blad  
SB 42.60